# 2. OPERATION CHART: QW-1572

GENERAL GUIDE

- Press Ⓑ to change from mode to mode. Each mode is explained in detail.
- After you perform an operation in any mode, pressing Ⓑ returns to the Timekeeping Mode.
- Holding down Ⓐ at any time illuminates the display.
- The backlight of this watch employs an electroluminescent (EL) light, which loses its illuminating power after very long term use.
- Frequent use of the backlight shortens the battery life.

Timekeeping Mode → Alarm Mode → Stopwatch Mode → Time Setting Mode

TIMEKEEPING MODE
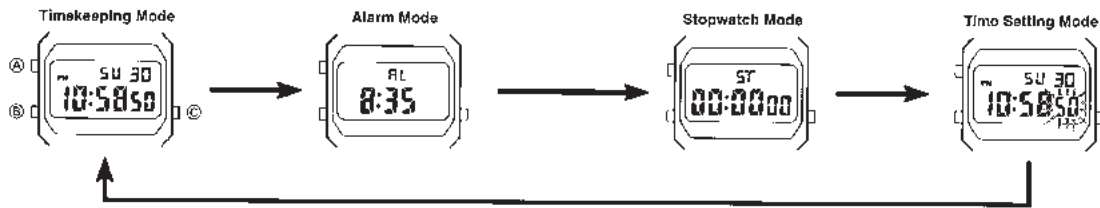
PM Indicator, Day of the week, Date, Hour, Second, Minute

- In the Timekeeping Mode, press Ⓒ to switch between the 12-hour and 24-hour formats.
- Day of the week is displayed as follows
  - SU:Sunday MO:Monday TU:Tuesday
  - WE:Wednesday TH:Thursday FR:Friday
  - SA:Saturday

ALARM MODE

Hourly time signal on indicator, Mode indicator, Minutes, Hour, Alarm on indicator

When the Daily Alarm is switched on, the alarm sounds for 20 seconds at the preset time each day. When the Hourly Time Signal is switched on, the watch beeps every hour on the hour.

To set the alarm time
1. Hold down Ⓐ while in the Alarm Mode until the hour digits start to flash on the display. The hour digits flash because they are *selected*.
2. Press Ⓐ to change the selection in the following sequence.

Hour → Minutes → Normal Alarm Mode (No digit flashes) →

- Once you reach the normal Alarm Mode, you have to hold down Ⓐ again until the hour digits start to flash.
3. Press Ⓒ to increase the selected digits. Holding down Ⓒ changes the number at high speed.
- The format (12-hour and 24-hour) of the alarm time matches the format you select for normal timekeeping.
- When setting the alarm time using the 12-hour format, take care to set the time correctly as morning or afternoon (PM).
4. After you set the alarm time, press Ⓐ to return to the Alarm Mode. At this time the Daily Alarm is switched on automatically.

To stop the alarm
Press Ⓐ to stop the alarm after it starts to sound.

To switch the Daily Alarm and Hourly Time Signal on and off
Press Ⓒ while in the Alarm Mode to change the status of the Daily Alarm and Hourly Time Signal in the following sequence.

[Alarm on Indicator/Hourly Time Signal on Indicator]

Both ON → Both OFF → Daily Alarm only → Hourly Time Signal only →

To test the alarm
Hold down Ⓒ while in the Alarm Mode to sound the alarm.

STOPWATCH MODE

Split time indicator, Mode indicator, Minutes, 1/100 second, Seconds

The Stopwatch Mode lets you measure elapsed time, split times, and two finishes. The range of the stopwatch is 59 minutes, 59.99 seconds.

### (a) Elapsed time measurement
Start (Ⓒ) → Stop (Ⓒ) → Re-start (Ⓒ) → Stop (Ⓒ) → Clear (Ⓐ)

(b) Split time measurement
Start (Ⓒ) → Split (Ⓐ) → Split release (Ⓐ) → Stop (Ⓒ) → Clear (Ⓐ)

(c) Split time and 1st-2nd place times
Start (Ⓒ) → Split (Ⓐ) First runner finishes. → Stop (Ⓒ) Second runner finishes. Record time of first runner. → Split release (Ⓐ) Record time of second runner. → Clear (Ⓐ)

TIME SETTING MODE

PM Indicator, Day of the week, Date, Hour, Seconds, Minutes

To set the time and date
1. Use Ⓑ to enter the Time Setting Mode.
- The seconds digits flash because they are *selected*.
2. Press Ⓐ to change the selection in the following sequence.

Seconds → Hour → Minutes → Month → Date → Day of the week →

3. While the seconds digits are selected (flashing), press Ⓒ to reset the seconds to "00". If you press Ⓒ while the seconds count is in the range of 30 to 59, the seconds are reset to "00" and 1 is added to the minutes. If the seconds count is in the range of 00 to 29, the minutes count is unchanged.
4. While any other digits (besides seconds) are selected (flashing), press Ⓒ to increase the number. While the day of the week is selected, pressing Ⓒ advances to the next day. Holding down Ⓒ changes the current selection at high speed.
5. After you set the time and date, press Ⓑ to return to the Timekeeping Mode.

- If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Timekeeping Mode automatically.